

HEALTH & MEDICAL SCALE

M301 HEIGHT & WEIGHT scale



M301 BABY scale



SALTER-BRICKNELL MECHANICAL scales



STANDARD WEIGHTS

OFFICE & SERVICE CENTER (MIDDLE EAST)

ENDEL WEIGH SYSTEMS LLC
22, BIN SABA BUILDING, BUR DUBAI
DUBAI, UAE
TEL: +971-4-3522077/3257822
FAX: +971-4-3522088
MOBILE: +971-50-7343742
E-MAIL: sales@dubaiweighing.com

SALES & SERVICE CENTER IN OMAN

AL HINAI NATIONAL ENTERPRISE (SALALAH - SOHAR - MUSCAT)
TEL: +968-96287711

Representatives & direct offices in
KENYA, TANZANIA, ZAMBIA, QATAR, TURKMENISTAN, IRAN.

Our manufacturing partners are



www.dubaiweighing.com

ENDEL WEIGH SYSTEMS LLC holds the right to change specifications mentioned in this catalog for equipments for their colors & technical specifications without any prior notice or to discontinue individual models. The colors of products supplied may marginally differ from the pictures in catalog.



Approved Products



YOUR PARTNER IN WEIGHING &
MATERIAL HANDLING EQUIPMENT



www.dubaiweighing.com
PRODUCT GUIDE

We also represent



LABORATORY & JEWELLERY WEIGHING BALANCES


AS series



Specification

Technical data	AS 160/C/2	AS 220/C/2
Max capacity	160 g	220 g
Minima load	10 mg	10 mg
Readability	0,1 mg	0,1 mg
Tare range	160 g	220 g
Repeatability	0,1 mg	0,1 mg
Linearity	±0,2 mg	,2 mg


EJB-NB series



Specification

Model	EJB-NB	EJB-NB	EJB-NB
Capacity	1200 gm	1500 gm	3000 g
Readability	0,01 gm	0,01 gm	0.1 gm
Display	LCD Display with White Backlight		
Pan Size	ø 120 mm	ø 120 mm	14cm x 15cm
Power	AC Adapter (12V/500mA)/ Rechargeable Battery 6 V/1.3 Ag		
Optional	RS-232 Interface for Printer / Pole Display		
Approvals	CE, OIML		

PS series



Specification

Technical data	PS 510/C/1	PS 1000/C/1	PS 3500/C/1	PS 4500/C/1
Max capacity	510 g	1000 g	3500 g	4500 g
Minima load	20 mg	20 mg	500 mg	500 mg
Readability	1 mg	1 mg	10 mg	10 mg
Tare range	-510 g	-1000 g	-3500 g	-4500 g

WTB series

Specification

Technical data	WTB 200	WTB 2000
Max capacity	200 g	2000 g
Minima load	0,001 g	0,01 g
Readability	-200 g	-2000 g
Tare range	0,003 g	0,03 g
Linearity	±0,003 g	±0,03 g
Pan Size	ø 115 mm	125 x 145 mm

TABLETOP & SIMPLE WEIGHING SCALES

ESW-2D/ ESW-2D-M series



Specification

Model	ESW-2D/ESW-2D-S		
Capacity	10 Kg	15 Kg	30 Kg
Accuracy	1 g	1 g	1 g
Pan Size	330 x 260 MM		
Display	Red LED Display		
Power	Rechargeable Battery 6V/4Ah/AC Power 220V		

EWS-H+ series



Specification

Model	EWS-H+		
Capacity	6 Kg	15 Kg	30 Kg
Accuracy	0.1 g	0.2 g	0.5 g
Pan Size	230 x 300 mm		
Display	24mm LCD Display with backlight		
Power	Rechargeable Battery 6V/4Ah/AC Adapter 12V/500mA		
Approvals	CE, OIML		

EWP series (SPLASH PROOF)



Specification

Model	EWS-H+		
Capacity	3 Kg	6 Kg	15 Kg
Accuracy	0.5 g	0.2 g	2 g
Pan Size	190 x 230 mm		
Display	25mm LCD Display with backlight		
Power	Rechargeable Battery 6V/4Ah/AC Adapter 12V/500mA		
Approvals	CE, OIML		

SW series

(Splash Water Proof)



Specification

Model	SW		
Capacity	6 Kg	15 Kg	30 Kg
Accuracy	1 g	2 g	5 g
Pan Size	200 x 260 mm		
Display	25mm LCD Display with backlight		
Power	Rechargeable Battery 6V/4Ah/AC Adapter 12V/500mA		
Optional	Rear Display		
Approvals	CE, OIML		

S29BR series (Splash Proof-SS)



Specification

Model	S29BR-6	S29BR-15
Capacity	6 Kg	15 Kg
Accuracy	1 g	2 g
Pan Size	190 x 230 mm	
Display	25mm LCD Display with backlight	
Power	Rechargeable Battery 6V/4Ah/AC Adapter 12V/500mA	
Optional	Rear Display	
Approvals	CE, Ip67	

RETAIL & PRICE COMPUTING SCALES



EPS+ series

Specification

Model	EPS+		
Capacity	6 Kg	15 Kg	30 Kg
Accuracy	1 g / 2 g	2 g / 5 g	5 g / 10 g
Pan Size	230 x 300 mm		
Display	20mm 3 LCD Display with backlight		
Power	Rechargeable Battery 6V/4Ah/AC Adapter 12V/500mA		
Optional	RS-232 Interface for Computer Connectivity		
Approvals	CE, OIML		



JP/JSP



Specification

Model	JP / JSP		
Capacity	15 Kg	30 Kg	45 Kg
Accuracy	2 g	5 g	10 g
Pan Size	240 x 370 mm		
Display	20mm 3 LCD Display with backlight		
Power	Rechargeable Battery 6V/4Ah/AC Adapter 12V/500mA		
Optional	RS-232 Interface for Computer Connectivity		
Approvals	CE, OIML		

EPS-1P/EPS1PR series (Low Profile)

Without Pole



With Pole



Specification

Model	EPS-1P / EPS-1PR		
Capacity	15 Kg	30 Kg	45 Kg
Accuracy	2 g	5 g	10 g
Pan Size	240 x 370 mm		
Display	20mm 3 LCD Display with backlight		
Power	Rechargeable Battery 6V/4Ah/AC Adapter 12V/500mA		
Optional	RS-232 Interface for Computer Connectivity		
Approvals	CE, OIML		

ECS-H+ series Counting Scale)



Specification

Model	ECH-H+		
Capacity	6 Kg	15 Kg	30 Kg
Accuracy	0.1 g	0.2 g	0.5 g
Pan Size	230 x 300 mm		
Display	20mm 3 LCD Display with backlight		
Power	Rechargeable Battery 6V/4Ah/AC Adapter 12V/500mA		
Optional	RS-232 Interface for Computer Connectivity		
Approvals	CE, OIML		

SHIPPING & PARCEL SCALE

PB - 200 series



Specification

Model	PB-200
Capacities	200 Kg
Resolution	50 / 100 gm
Patter Size	355 x 443 mm

Model	PB-200
Adaptor	SMPS Adaptor (12V, 1.5A)
Battery	Mn Battery (C size x 4) 140 hr
Function	Brightness, Auto off
Approvals	CE, OIML

DISPLAY : LCD / 6 DIGIT LCD WITH BACKLIGHT : 134 X 48.6 MM WITH WHITE BACKLIGHT

LABEL PRINTING SCALE

CL-5000J series




Specification

Model	CL-5000J-C		
Capacity	6 Kg	15 Kg	30 Kg
Resolution	1 g	5 g	10 g
Display Digit	4/5/6/6 (Pre-tare/ Weight/ Unit Price/ Total Price)		
Display Type	4 LCD Display + Dot Matrix LCD (60 x 8 Dots)		
Printer Speed	75mm / Sec		
Printer Resolution	202 dpi		
Label Size	Width 40-64 / Length 30 - 20		
Power Source	AC 100-240V, 50/60Hz		
Platter Size	382mm (W) x 246mm (L)		

INDUSTRIAL SCALES

EP series (Platform Scales)

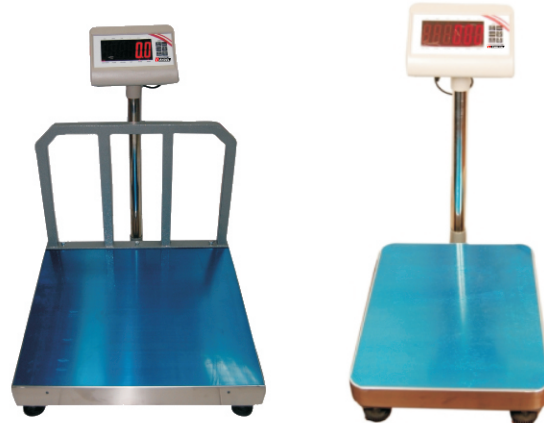

Specification

Model	EP	Model	EP
Platform Sizes	400 x 500mm	Platform Sizes	450 x 600mm
Capacities	100/150/200Kg	Capacities	100/150/300/500Kg
Accuracy	10/20/20g	Accuracy	10/10/20/50g

Model	EP	Model	EP
Platform Sizes	600 x 600mm	Platform Sizes	750 x 750mm
Capacities	150/300/500Kg	Capacities	600Kg
Accuracy	20/50/100g	Accuracy	50gm

Display	Large Red LED Display 6 Digit (with indications)		
Power	Rechargeable Battery 6V/1.2Ah/ with AC power cord built in for charging		
Optional	RS - 232 Interface for Computer Connectivity, Back Grill Support		
Approvals	CE		

EPSS series (Heavy Duty Floor Scales)



Specification

Model	EPSS1010	EPSS1212	EPSS1515
Platform Sizes	100 x 100cm	120 x 120cm	150 x 150cm
Capacity	1T/2T/3T	1T/2T/3T	2T/3T/5T
Accuracy	100g/200g/500g	100g/200g/500g	200g/500g/500g
Load Cells	Ip67 Alloy Steel x 4		
Divisions	3000e		
Display	LED or LCD with SS or ABS housing as per requirement		
Power	Rechargeable Battery 6V/1.2Ah/ AC Adapter 9V/800mA		
Optional	RS-232 Interface for Computer Connectivity		
Optional	Approach Ramp and Stand Indicator		
Approvals	CE, OIML		

PALLET SCALE series

- Capacities from 1T to 2T
- 52mm Large LCD Display with backlight
- Selectable graduation sizes
- Battery provide up to 10 hours of continuous use.



Model	END-TPS-I/END-TPS-II		
Weighing Capacity	2000 Kg x 0.5 Kg.		
SIZE	TYPE	A	B
	W (mm)	560	680
	L (mm)	1150	1220

INDUSTRIAL & GENERAL APPLICATION SCALES

U-BAR Scale



ANIMAL WEIGHING Scale



CRANE SCALES



CR series (Portable)

OCS series (Heavy Duty)

ECR series (Low Profile)

WIRELESS system

Specification

Capacities	200Kg	500Kg	2 T	3 T	5 T	10 T
Accuracy	100g	200g	1Kg	1Kg	2Kg	5Kg
Accuracy Class	Compatible to to OIML-III					
Display	Large Red LED 1.2inch Display, Rapid Display (within 3-5 second)					
Power	Rechargeable Battery 12V/7Ah/AC Adapter					
Optional	Remote Controller					
Product Weight	5.5Kg	5.5Kg	16Kg	18Kg	23Kg	35Kg
Approvals	CE, GS 500% SAFETY overload from TUV					
	CUSTOMIZED CAPACITIES UP TO 50 TON AVAILABLE UPON APPLICATION - USAGE					

WEIGHING INDICATORS



END-T7 series



PW/PC series



XK-3101 series



EKW/EKW-R



DFWLKI (Weighbridge)



VT-300 (Weighbridge)

MATERIAL HANDLING EQUIPMENTS

HAND PALLET TRUCK



Specification

Model	NP-25	NP-30
Capacity	2.5 T	3.0 T
Width Overall Forks	540/685mm	
Fork Length	1150/1220mm	
Min Fork Height	85mm	85mm
Max Fork Height	200mm	200mm
Steering Wheel	Ø200 x 50mm D	
Load Roller Tandem	8x 70mm D	
Load Roller	Nylon / PU	
Steering Wheel	Nylon / PU	
Approvals	Conforms to EN 1752-2	

SCISSOR LIFT (High Left Hand Pallet Truck)

Specification

Model	SLP 10	SLP 15
Capacity	1000	1500
Fork width (W)	540	680
Fork Length (L)	1150	1500
Max. Fork Height (H)	85	85
Max. Fork Height	800	800
Front Wheel	PU/Nylon 80*85	
Rear Wheel	PU/Nylon 180*50	
Net Weight	110	125



MANUAL STACKER (HYDRAULIC HAND STACKER)

HEAVY DUTY Design with High Quality Construction

Specification

ITEM/TYPE	Model		
Capacity Q	kg	1500	
Min. Fork height (H)	mm	85	
Max. Fork Height (H1)	mm	1600	
Min. Mast Height (H1)	mm	1980	
Size of Fork e*s	mm	150/160/60	
Length of Fork	mm	900/1150	
Width of overall fork (adjust/fixe) B5	mm	330~740/550	
Radius of Gyration	mm	1250	
Weight	kg	260	
Fork Rollers	mm	Ø74x70	
Big Wheel	mm	Ø180x50	



SEMI ELECTRIC STACKER

Specification

Model		
Capacity Q	kg	1500
Load center C	mm	600
Lifting Height H	mm	3500
Fork Length l	mm	1150
Fork Width B5	mm	560
Minimum Turning Radius	mm	2100
Lifting Motor V	mm	12/2.0
Battery V/Ah	mm	12/120
Charger	kg	220/12
Overall Length l1	mm	1770
Overall Width B	mm	800
Overall Height H1	mm	2020
Net Weight	kg	490

