

A7 System Scales

A7-60 All in 1

Perfectly Computerized for Weighing management and control



Make your business more efficient and competitive

All in One Application:



Check Weighing (Standard)




Piece Counting (Standard)



Takeout Weighing (Optional)





- Class Weighing (Optional)
- Formula Weighing (Optional)



T-Scale | Your Precision Partner



_	1+		_
	X.	0000	
Che	ck Weighing	Piece Counting	Target Weighing
	~		
Takeo	out Weighing	Class Weighing	Formula Weighing
	Product	Setting	
No.	0001	Secting	
Product	apple		Edi
	8764906167072	2	
Pre-tare	1	5	Sav
U.W.		g/pcs	
ні	5	kg -	
Lo	2		
			Bac
			вас
	Max	6kg Min 20g d=1g A1.14.0	04
- D	ab sk300 Lab		
Label			
Receipt	Lab2 Lab	Date	Time
1	Lab4 Lab		tem NO. Plu Num
	Labo Lab	Product No: Product: Product	
	Lab8 lab1		Weigh
			N N N N N N N N N N N N N N N N N N N
	lab9	1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	81228

Graphic operation interface

Graphic interactive operation interface, quick and easy to use. It help you increase productivity and avoid mistakes.

Multilingual information management system


Computerized product management system, easily input and call out PLU. It support multi-language operating environment.

Customized daily and product reprot

It support produce diversyied daily reoprts and product report on screen or export to a PC software.

Versatility in receipts and labels

By RS-232, It can connected to a ticket or label printer. Many ticket and label formats can be selected from display. Also Customized printing format available for different customers' needs.

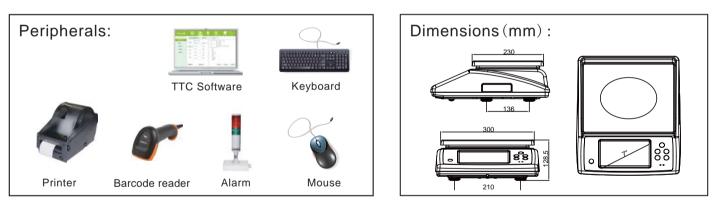

Model	A7-60 All in 1				
Capacity	3kg/6kg	6kg/15 kg	15kg/30 kg		
Readability(d)	0.1g/0.2g	0.2g/0.5g	0.5g/1g		
Readability(e)	1g/2g	2g/5g	5g/10g		
Platform	230 x 300mm				
Display	7" 800 x 480 High-definition color screen				
Panel	Resistance touchscreen				
Memory	RAM: 1GB Flash: 512 MB				
Operating System	TOS 2.0 Embedded system Option :Win CE sysytem				
Ports	2 x USB, 2 x RS232, 1 x RJ11, 1 x RJ45				
Battery	Rechargeable battery for 20 hours continue use(Optional)				

Distributors: